

#4

**PATENT APPLICATION**

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re application of

Herman Joris CASIER, et al.

Appln. No.: 10/026,435

Confirmation No.: 1564

Filed: December 27, 2001

For: xDSL CLASS C-AB DRIVER



Attorney Docket No. Q67690

Group Art Unit: Unknown

Examiner: Unknown

**SUBMISSION OF PRIORITY DOCUMENT**

Commissioner for Patents  
Washington, D.C. 20231

Sir:

Submitted herewith is a certified copy of the priority document on which a claim to priority was made under 35 U.S.C. § 119. The Examiner is respectfully requested to acknowledge receipt of said priority document.

Respectfully submitted,


A handwritten signature in black ink, appearing to read "David J. Cushing", written over a horizontal line.

David J. Cushing  
Registration No. 28,703

SUGHRUE MION, PLLC  
2100 Pennsylvania Avenue, N.W.  
Washington, D.C. 20037-3213  
Telephone: (202) 293-7060  
Facsimile: (202) 293-7860

Enclosures: Europe 00403694.3

Date: February 12, 2002



**THIS PAGE BLANK (USPTO)**



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets



Q67690  
1581

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

00403694.3

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk

DEN HAAG, DEN  
THE HAGUE,  
LA HAYE, LE

14/12/01



**THIS PAGE BLANK (USPTO)**



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

**Blatt 2 der Bescheinigung**  
**Sheet 2 of the certificate**  
**Page 2 de l'attestation**

Anmeldung Nr.:  
Application no.:  
Demande n°: 00403694.3

Anmeldetag:  
Date of filing: 28/12/00  
Date de dépôt:

Anmelder:  
Applicant(s):  
Demandeur(s):  
ALCATEL  
75008 Paris  
FRANCE

Bezeichnung der Erfindung:  
Title of the invention:  
Titre de l'invention:  
xDSL class C-AB driver

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:  
State:  
Pays:

Tag:  
Date:  
Date:

Aktenzeichen:  
File no.  
Numéro de dépôt:

Internationale Patentklassifikation:  
International Patent classification:  
Classification internationale des brevets:

H03F1/32, H03F3/21

Am Anmeldetag benannte Vertragsstaaten:  
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR  
Etats contractants désignés lors du dépôt:

Bemerkungen:  
Remarks:  
Remarques:

**THIS PAGE BLANK (USPTO)**

xDSL CLASS C-AB DRIVERField of the invention

The present invention is related to a novel  
5 line driver for applications such as ADSL (Asymmetric Digital Subscriber Line) or VDSL (Very High Speed Digital Subscriber Line).

State of the art

10 In the design of line drivers for applications such as ADSL (Asymmetric Digital Subscriber Line) or VDSL (Very High Speed Digital Subscriber Line), power consumption is a critical issue and signal linearity requirements are stringent. Manufacturers are continually  
15 looking for solutions to decrease power consumption. At the moment, the DSL chip market is estimated at 50 million chip sets for 2000 (total value of more than 1 billion USD in 2000).

A traditional class G driver consumes about  
20 1.3 Watt to produce an output signal of 100 mWatt. The power consumption of the class G driver may be reduced by about  $100 \text{ mWatt}/\eta$  (where  $\eta$  is the efficiency of the amplifier which typically has a value between 0.05 and 0.10) through use of an active back termination. Such an  
25 active back terminated line driver is described in EP-A-0901221.

A class 0 driver can also be used, including switches and circuitry to monitor the crest factor of the transmitted signal and to appropriately switch between two  
30 power supply levels.

A traditional switch mode driver (SW-DRIVER), which consists of a  $\Sigma\Delta$ -modulator ( $\Sigma\Delta$ ), circuitry (SW) to monitor the crest factor of the transmitted signal and to

appropriately switch between different power supply levels, a low pass filter (F1) and a hybrid (HY), less power as digital technology proceeds to deeper submicron technologies. Such a switch mode driver for instance is shown in Fig. 1b of "Basic considerations and topologies of switched-mode assisted linear power amplifiers", IEEE transactions on Industrial Electronics, Vol. 44 No.1 pp 116-123, February 1997. Power consumption is optimized through switching between the different power supply levels. In an improved version of the switch mode driver (SW-DRIVER), the crest factor is monitored in the hybrid (HY). In this way, power consumption is further optimized. The power consumption may even be further reduced by about 100 mWatt/ $\eta$  ( $\eta$  being the efficiency of the amplifier) through use of active back termination.

A switch mode amplifier (digital amp.) in parallel with a linear amplifier (analog amp.) each producing part of an outputted audio signal is disclosed in Fig. 4 of "A New High-Efficiency and Super-Fidelity Analog Audio Amplifier with the aid of Digital Switching Amplifier: Class K Amplifier", (IEEE publication, Nam-Sung Jung, Nam-In Kim & Gyu-Hyeong Cho, 1998). In the class K amplifier, the linear amplifier (analog amp.) is an independent source, whereas the switch mode amplifier (digital amp.) is controlled by the voltage sensed over the resistor  $R_{sense}$  and consequently is dependent on the current source by the linear amplifier (analog amp.). Also Fig. 2 of "Basic considerations and topologies of switched-mode assisted linear power amplifiers", IEEE transactions on Industrial Electronics, Vol. 44 No.1 pp 116-123, February 1997 and Fig. 3 of "A Design of a 10-W Single-Chip Class D audio amplifier with Very High Efficiency using CMOS Technology", IEEE Transactions on Consumer



Electronics, Vol. 45, No. 3, pp 465-473, August 1999 show switched-mode assisted linear amplifiers with a structure and functionality similar to that of the class K amplifier of "A New High-Efficiency and Super-Fidelity Analog Audio  
5 Amplifier with the aid of Digital Switching Amplifier: Class K Amplifier", already cited above.

The switching mode line driver (SW-DRIVER) is the most power efficient line driver, but is very sensitive for power supply variations (low power supply rejection)  
10 and clock jitter. This results in errors in the transmitted signal.

#### Aims of the invention

The present invention aims to provide a novel  
15 line driver which is linear, stable, and efficient. The output of said driver should be free of errors due to power supply variations and clock jitter.

#### Summary of the invention

20 The present invention concerns a line driver for amplifying an input signal, said line driver comprising:

- a non-linear amplifier arranged to provide a first output signal amplifying said input signal
- 25 - an analogue linear amplifier providing a second output signal based on the difference between the input signal and the first output signal, placed in parallel with said non-linear amplifier and being dependent thereon, and
- 30 - combining means arranged to combine said first output signal and said second output signal to provide a total output signal to an output line.

The present invention equally concerns a line driver for amplifying an input signal, said line driver comprising:

- a first input terminal for receiving said input signal,
- 5 - a non-linear amplifier connected to said input terminal and arranged to provide a first output signal at a first output terminal,
- an analogue linear amplifier comprising a second and a third input terminal and a second output terminal, set
- 10 up as a comparator between said input signal and said first output signal and arranged to provide a second output signal at said second output terminal, and
- combining means arranged to combine said first output
- 15 signal and said second output signal to provide a total output signal to an output line.

In a line driver according to the present invention, the proportion of the first output signal in the total output signal is preferably at least 95%.

- The line driver of the invention can comprise
- 20 a digital to analogue converter arranged to convert the input signal to an analogue input signal and that said analogue input signal is fed to the second input terminal of the linear amplifier

- Preferably, the linear amplifier is selected
- 25 from the group consisting of class A and class A/B amplifiers, and the non-linear amplifier is preferably selected from the group consisting of switching mode amplifiers, clipping amplifiers, class B, G or K amplifiers and pulse width modulation amplifiers.

- 30 The combining means can comprise e.g. a hybrid. The input signal can be generated by a DMT.

In an advantageous embodiment of the present invention, the line driver further comprises an active back termination circuit.

A second aspect of the present invention is A  
5 analogue-digital combined amplifier comprising:

- a non-linear digital amplifier serving as an independent current source
- an analogue linear amplifier serving as a voltage source dependent on said non-linear digital amplifier,

10 wherein the output of said analogue-digital combined amplifier is a combination of the output of said non-linear digital amplifier and said analogue linear amplifier.

Also in this aspect, the linear amplifier can  
15 be selected from the group consisting of class A and class A/B amplifiers, and the non-linear amplifier is preferably selected from the group consisting of switching mode amplifiers, clipping amplifiers, class B, G or K amplifiers and pulse width modulation amplifiers.

20 Another aspect of the present invention is a method for amplifying an input signal, comprising the following steps:

- providing a line driver according to the present invention,
- 25 - feeding said line driver at the input terminal with said input signal,
- a first amplifying step, comprising amplifying said input signal with the non-linear amplifier and providing the first output signal at the first output terminal,
- 30 - a second amplifying step, performed in parallel with said first amplifying step and comprising a digital to analogue conversion of the input signal to an analogue input signal, and comparing said analogue input signal

with said first output signal, using an analogue linear amplifier, providing a second output signal at the second output terminal, and

- a combination step comprising combining said first  
5 output signal with said second output signal to obtain a total output signal to an output line.

Said combination step can be performed using a hybrid, and the input signal can be generated by a DMT.

#### 10 Short description of the drawings

Fig. 1 shows a switching mode line driver as known from the prior art.

Fig. 2 represents a Class C-AB driver according to the present invention.

- 15 Fig. 3 draws a Class C-AB driver according to a preferred embodiment of the present invention.

#### Detailed description of the invention

- The present invention describes a novel line  
20 driver, called C-AB driver. It comprises at least an analogue linear amplifier, coupled in parallel with a non-linear line driver and producing only a small part of the output signal power, and can compensate for the errors in the output signal from the non-linear line driver due to  
25 power supply variations and clock jitter.

An example of a class C-AB driver according to the present invention can be seen in fig. 2.

- The class C-AB driver 1 comprises a non-linear amplifier 3, being the independent source, and  
30 further comprises an analogue linear amplifier 5 which is controlled to compensate for the non linearity of the non-linear amplifier 3 and thus is dependent.

According to the present invention, the analogue linear amplifier 5 compares the input signal 11 as

sent by the DMT 2 and converted digital to analogue by D/A converter 15 with the output signal 13 at the output of the non-linear amplifier 3. The difference between these signals is compensated for by the analogue linear amplifier 5 and the output of both the non-linear amplifier 3 and the analogue linear amplifier 5 are combined by hybrid 9 and sent on line 7.

The non-linear amplifier can be any non-linear amplifier. Examples are clipping amplifiers, switching mode amplifiers, class K, G or B amplifiers, pulse width modulators, ... The analogue linear amplifier can be any analogue linear amplifier, such as a class A or class A/B amplifier.

A 3'rd order/4'th order RC or LC filter (F1) is required to limit the band to 1 Mhz if a switching mode driver is used as the non-linear amplifiers.

It is clear that the set-up of the present invention can be combined with other power-saving techniques, such as active back termination.

20

#### Description of a preferred embodiment of the invention

In fig 3, one can see a class C-AB line driver 1 according to a preferred embodiment of the present invention, containing a traditional switch mode line driver 17 (with a  $\Sigma\Delta$ -modulator ( $\Sigma\Delta$ ) 19, circuitry (SW) 21 to switch between different power supply levels, and a low pass filter (F1) 23) that produces about 95% of the required output signal power. Such a switch mode line driver 17 can be seen in fig. 1.

30

According to this embodiment, as can be seen in fig. 3, the class C-AB line driver 1 contains, in parallel with the switch mode line driver 17, a class AB amplifier 5 that produces about 5% of the required output

signal power. This class AB amplifier 5 thereto compares the signal at the output 13 of the switch mode line driver 17 with the digital to analog converted (15) input signal 11 of the class C-AB line driver 1. The difference between 5 these two signals is compensated for by the class AB amplifier 5. Again, a hybrid (HY) 9 combines the signals produced by the switch mode line driver 17 and the class AB amplifier 5.

The distortion due to power supply changes 10 and clock jitter in this embodiment is reduced by a factor 5 to 8 in comparison with the traditional switching mode line driver as in fig. 1.

An additional advantage with the class C-AB line driver according to the invention is that power supply 15 can be simplified compared to the traditional G-class amplifier. A class G amplifier needs GND (ground), +Vcc, +Vcc/2, -Vcc and -Vcc/2 potentials. The non-linear and linear amplifier of the class C-AB line driver according to the invention only need +Vcc, -Vcc and GND connections. DC- 20 de-coupling capacitors, inserted at the output of the non-linear amplifier are useful to avoid power supply asymmetry effects when driving the line with two non-linear amplifiers.

CLAIMS

1. Line driver for amplifying an input signal, said line driver comprising :

- 5 - a non-linear amplifier (3) arranged to provide a first output signal amplifying said input signal
- an analogue linear amplifier (5) providing a second output signal based on the difference between the input signal and the first output signal, placed in parallel
- 10 with said non-linear amplifier and being dependent thereon, and
- combining means arranged to combine said first output signal and said second output signal to provide a total output signal to an output line (7).

15 2. Line driver for amplifying an input signal, said line driver comprising:

- a first input terminal (11) for receiving said input signal,
- a non-linear amplifier (3) connected to said input
- 20 terminal (11) and arranged to provide a first output signal at a first output terminal (13),
- an analogue linear amplifier (5) comprising a second (6) and a third input terminal (8) and a second output terminal (10), set up as a comparator between said input
- 25 signal and said first output signal and arranged to provide a second output signal at said second output terminal (10), and
- combining means arranged to combine said first output signal and said second output signal to provide a total
- 30 output signal to an output line (7).

3. Line driver as in claim 1 or 2, characterised in that the proportion of the first output signal in the total output signal is at least 95%.

4. Line driver as in any of the claims 1 to 3, characterised in that the line driver comprises a digital to analogue converter (15) arranged to convert the input signal to an analogue input signal and that said  
5 analogue input signal is fed to the second input terminal (6) of the linear amplifier (5).

5. Line driver as in any of the claims 1 to 4, characterised in that the linear amplifier (5) is selected from the group consisting of class A and class A/B  
10 amplifiers.

6. Line driver as in any of the claims 1 to 5, characterised in that the non-linear amplifier (3) is selected from the group consisting of switching mode amplifiers, clipping amplifiers, class B, G or K amplifiers  
15 and pulse width modulation amplifiers.

7. Line driver as in any of the claims 1 to 6, characterised in that the combining means comprise a hybrid (9).

8. Line driver as in any of the claims 1 to 7, characterised in that the input signal is generated by a DMT (2).  
20

9. Line driver as in any of the claims 1 to 8, characterised in that it further comprises an active back termination circuit.

25 10. An analogue-digital combined amplifier comprising:

- a non-linear digital amplifier (3) serving as an independent current source
- an analogue linear amplifier (5) serving as a voltage  
30 source dependent on said non-linear digital amplifier,

wherein the output of said analogue-digital combined amplifier is a combination of the output of said



non-linear digital amplifier and said analogue linear amplifier.

11. Analogue-digital combined amplifier as in claim 10, characterised in that the linear amplifier (5) is  
5 selected from the group consisting of class A and class A/B amplifiers.

12. Analogue-digital combined amplifier as in claim 10 or 11, characterised in that the non-linear  
10 amplifier (3) is selected from the group consisting of switching mode amplifiers, clipping amplifiers, class B, G or K amplifiers and pulse width modulation amplifiers.

13. A method for amplifying an input signal, comprising the following steps:

- providing a line driver (1) such as in claim 1 or 2,
- 15 - feeding said line driver (1) at the input terminal (11) with said input signal,
- a first amplifying step, comprising amplifying said input signal with the non-linear amplifier (3) and providing the first output signal at the first output  
20 terminal (13),
- a second amplifying step, performed in parallel with said first amplifying step and comprising a digital to analogue conversion of the input signal to an analogue input signal, and comparing said analogue input signal  
25 with said first output signal using an analogue linear amplifier (5), providing a second output signal at the second output terminal (10), and
- a combination step comprising combining said first output signal with said second output signal to obtain a  
30 total output signal to an output line (7).

14. The method as in claim 13, characterised in that said combination step is performed using a hybrid (9).

12

15. The method as in claim 13 or 14, characterised in that the input signal is generated by a DMT (2).

ABSTRACTxDSL CLASS C-AB DRIVER

- 5                   The present invention is related to a line driver for amplifying an input signal, said line driver comprising :
- a non-linear amplifier (3) arranged to provide a first output signal amplifying said input signal
  - 10 - an analogue linear amplifier (5) providing a second output signal based on the difference between the input signal and the first output signal, placed in parallel with said non-linear amplifier and being dependent thereon, and
  - 15 - combining means arranged to combine said first output signal and said second output signal to provide a total output signal to an output line (7).

(Figure 2)

**THIS PAGE BLANK (USPTO)**

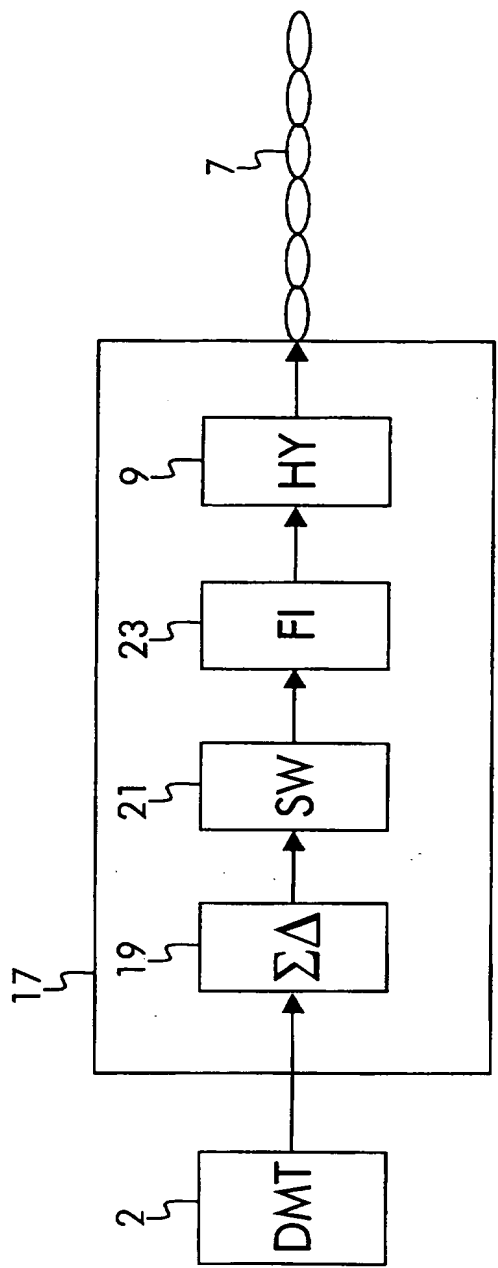


Fig. 1

- 2/3 -

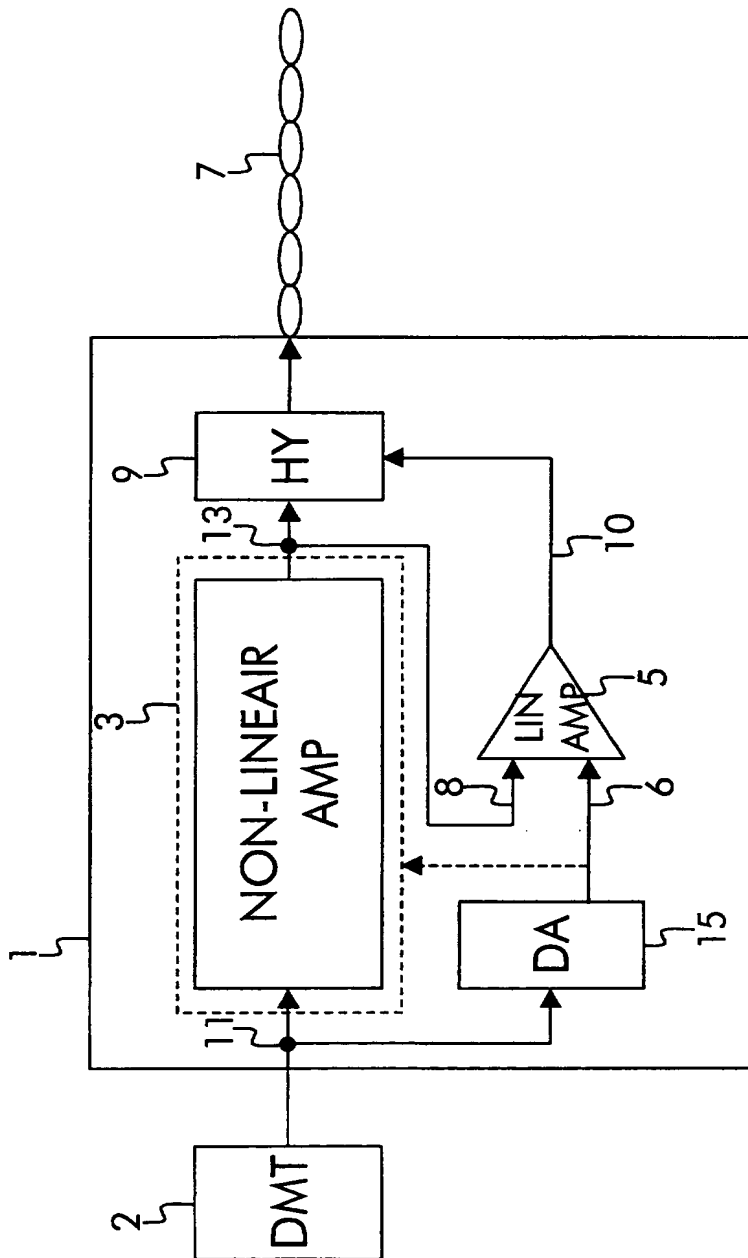


Fig. 2

- 3/3 -

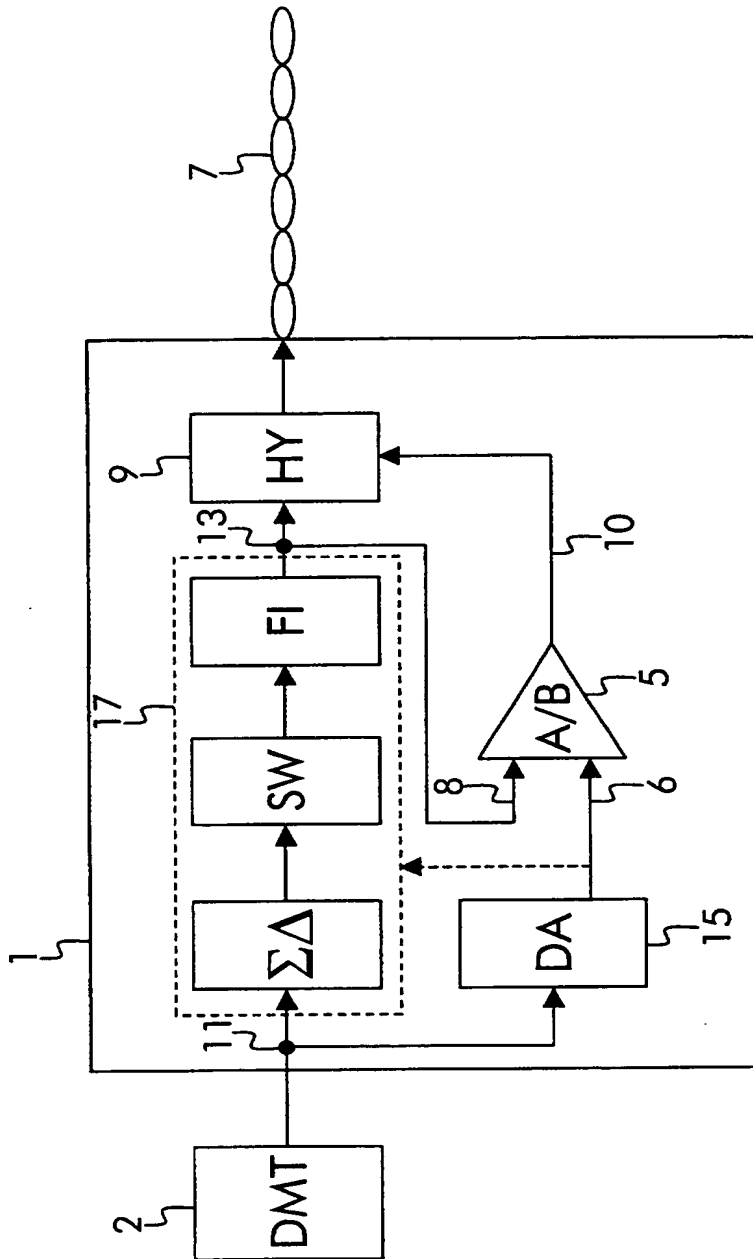


Fig. 3

**THIS PAGE BLANK (USPTO)**